


# PUMP PERFORMANCE CURVES

TYPE: SUBMERSIBLE DRAINAGE PUMP		MODEL: SH422	FREQUENCY: 60Hz
<b>STANDARD SPECIFICATIONS</b>			
DISCHARGE BORE	100 mm		
HEAD	Max: 68 m	Rated: 60 m	
CAPACITY	Max: 2.3 m <sup>3</sup> /min	Rated: 1.1 m <sup>3</sup> /min	
MOTOR OUTPUT	22 kW		
PHASE x VOLTAGE	3 Øx 460 V		
CURRENT	35.5 A		
POLES/REVOLUTION	2 P/ S.S.3450 min <sup>-1</sup>		
STARTING METHOD	Star-Delta start		
INSULATION CLASS	F		

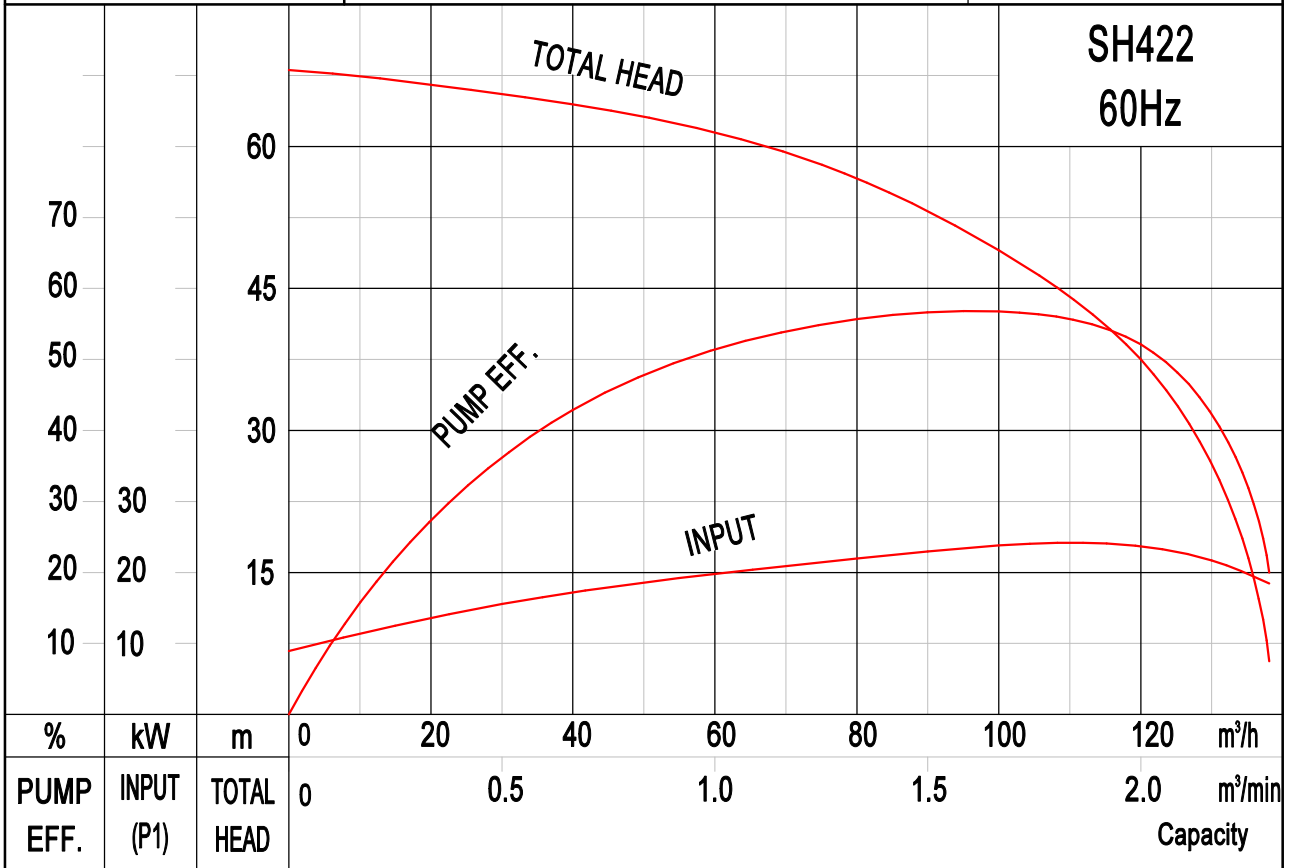

ZHEJIANG FENGYUAN PUMP INDUSTRY CO., LTD.