


PUMP PERFORMANCE CURVES

| | | | |
|--------------------------------|---------------------------------|--------------------------------|-----------------|
| TYPE: SUBMERSIBLE PUMP | | MODEL: SH675 | FREQUENCY: 60Hz |
| STANDARD SPECIFICATIONS | | | |
| DISCHARGE BORE | 150 mm | | |
| HEAD | Max: 132 m | Rated: 120 m | |
| CAPACITY | Max: 2.8 m ³ /min | Rated: 1.5 m ³ /min | |
| MOTOR OUTPUT | 75 kW | | |
| PHASE x VOLTAGE | 3 Øx 460 V | | |
| CURRENT | 110 A | | |
| POLES/REVOLUTION | 2 P/ S.S.3450 min ⁻¹ | | |
| STARTING METHOD | Stae-Delta start | | |
| INSULATION CLASS | F | | |

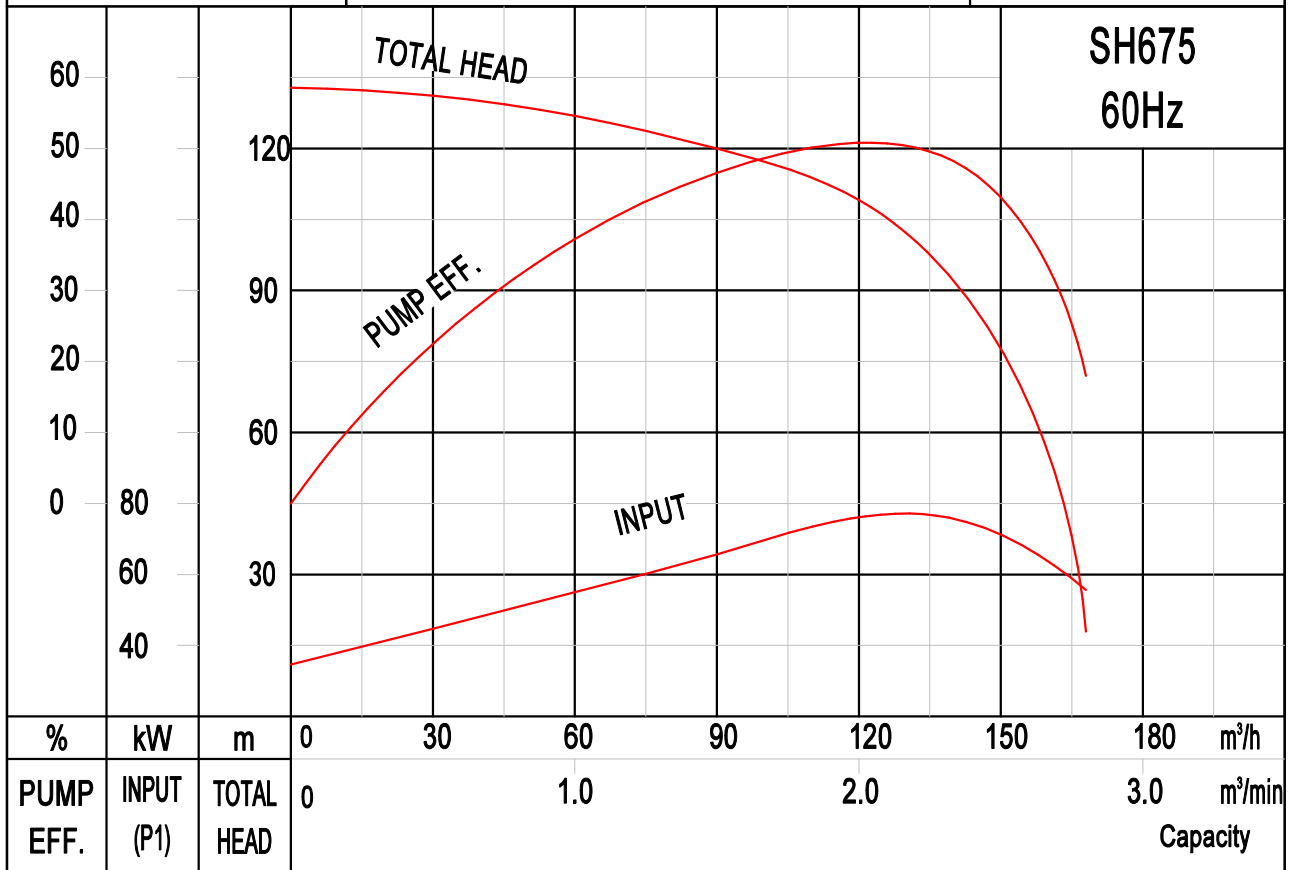

ZHEJIANG FENGYUAN PUMP INDUSTRY CO., LTD.